



All materials supplied are in compliance with the requirements of the List of Prohibited Substances

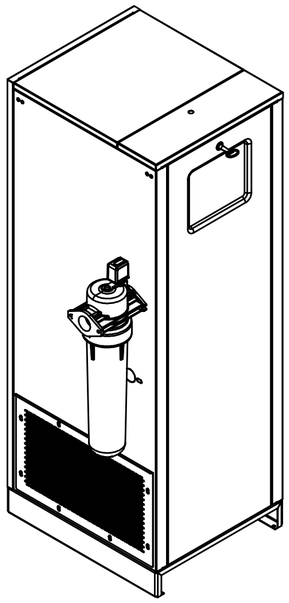


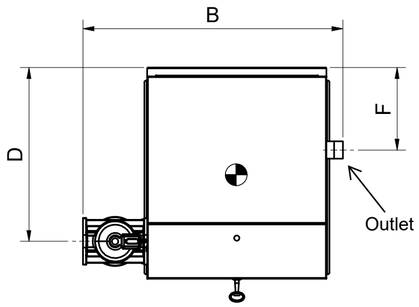


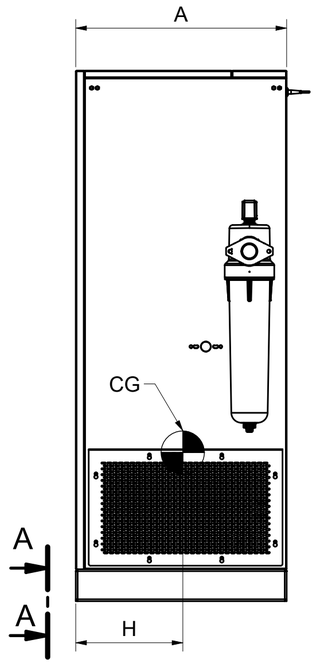

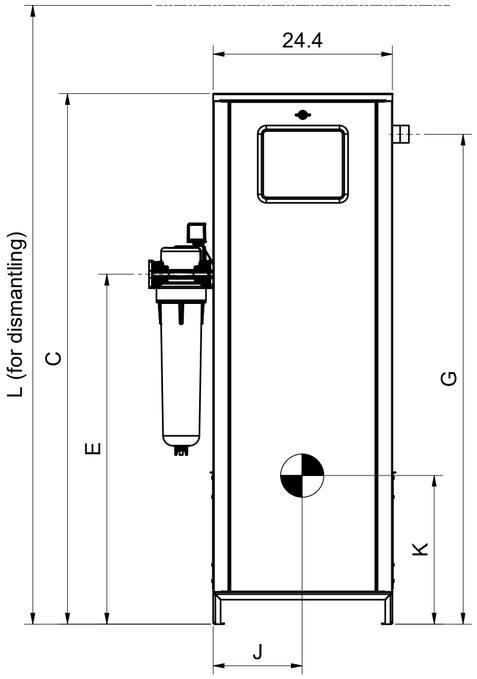

POWER SUPPLY
A (1 : 15)



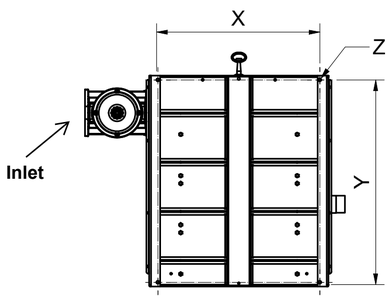

Table

Model	PDP	Mass	In-Out	A	B	C	D	E	F	G	H	J	K	L	X	Y	ØZ
CD 25+	-5 °F	210 lbs	NPT1/2" - NPT1/2"	15.51	30.81	47.44	4.33	34.65	4.53	35.24	6.93	12.32	22.68	53.35	22.05	14.17	0.35
CD 35+	-5 °F	220 lbs	NPT0,75" - NPT0,75"	15.51	31.95	47.44	4.33	34.65	4.53	35.24	6.93	12.32	22.68	53.35	22.05	14.17	0.35
CD 50+	-5 °F	247 lbs	NPT1" - NPT1"	15.51	31.95	47.44	4.33	34.65	4.53	41.93	6.46	12.24	24.09	61.89	22.05	14.17	0.35
CD 65+	-5 °F	293 lbs	NPT1" - NPT1"	15.51	31.95	58.86	4.33	34.65	4.53	49.02	6.34	12.28	28.82	71.14	22.05	14.17	0.35
CD 80+	-5 °F	324 lbs	NPT1" - NPT1"	15.51	33.53	58.86	4.33	34.65	4.53	54.92	6.26	12.32	30.2	88.66	22.05	14.17	0.35
CD 105+	-5 °F	377 lbs	NPT1 1/2" - NPT1 1/2"	15.51	33.53	72.24	10.28	34.65	4.53	66.73	6.26	12.24	36.14	106.38	22.05	14.17	0.35
CD 125+	-5 °F	501 lbs	NPT1 1/2" - NPT1 1/2"	22.2	33.53	58.86	16.97	34.65	4.53	49.02	9.65	12.28	28.31	75.67	22.05	20.87	0.35
CD 150+	-5 °F	539 lbs	NPT1 1/2" - NPT1 1/2"	22.2	33.53	58.86	16.97	34.65	4.53	54.92	9.49	12.4	30.24	88.66	22.05	20.87	0.35
CD 195+	-5 °F	638 lbs	NPT2" - NPT2"	22.2	33.53	72.24	16.97	34.65	11.22	66.73	10.04	12.48	35.94	106.38	22.05	20.87	0.35
CD 225+	-5 °F	766 lbs	NPT2" - NPT2"	28.9	35.38	72.24	23.66	47.64	11.22	54.92	12.76	12.52	29.72	88.66	22.05	27.56	0.35
CD 300+	-5 °F	911 lbs	NPT2" - NPT2"	28.9	35.38	72.24	23.66	47.64	12.2	66.73	13.35	12.52	35.08	106.38	22.05	27.56	0.35
CD 20+	-40 °F	227 lbs	NPT1/2" - NPT1/2"	15.51	30.81	47.44	4.33	34.65	4.53	35.24	6.93	12.32	22.68	53.35	22.05	14.17	0.35
CD 30+	-40 °F	227 lbs	NPT0,75" - NPT0,75"	15.51	30.81	47.44	4.33	34.65	4.53	35.24	6.93	12.32	22.68	53.35	22.05	14.17	0.35
CD 40+	-40 °F	247 lbs	NPT0,75" - NPT0,75" 6	15.51	31.95	47.44	4.33	34.65	4.53	41.93	6.46	12.24	24.09	61.89	22.05	14.17	0.35
CD 55+	-40 °F	292 lbs	NPT1" - NPT1"	15.51	31.95	58.86	4.33	34.65	4.53	49.02	6.34	12.28	28.82	71.14	22.05	14.17	0.35
CD 65+	-40 °F	320 lbs	NPT1" - NPT1"	15.51	31.95	58.86	4.33	34.65	4.53	54.92	6.26	12.32	30.2	88.66	22.05	14.17	0.35
CD 85+	-40 °F	377 lbs	NPT1 1/2" - NPT1 1/2"	15.51	33.53	72.24	4.33	34.65	4.53	66.73	6.26	12.24	36.14	106.38	22.05	14.17	0.35
CD 105+	-40 °F	495 lbs	NPT1 1/2" - NPT1 1/2"	22.2	33.53	58.86	16.96	34.65	4.53	49.02	9.65	12.28	28.31	75.67	22.05	20.87	0.35
CD 125+	-40 °F	539 lbs	NPT1 1/2" - NPT1 1/2"	22.2	33.53	58.86	16.97	34.65	4.53	54.92	9.49	12.4	30.24	88.66	22.05	20.87	0.35
CD 170+	-40 °F	637 lbs	NPT1 1/2" - NPT1 1/2"	22.2	33.53	72.24	16.97	34.65	4.53	66.73	10.04	12.48	35.94	106.38	22.05	20.87	0.35
6 CD 190+	-40 °F	766 lbs	NPT2" - NPT2"	28.9	33.53	72.24 6	23.66	47.64	11.22	54.92	12.76	12.52	29.72	88.66	22.05	27.56	0.35
CD 250+	-40 °F	901 lbs	NPT2" - NPT2"	28.9	35.38	72.24	23.66	47.64	11.22	66.73	13.35	12.52	35.08	106.38	22.05	27.56	0.35
CD 335+	-40 °F	1158 lbs	NPT2" - NPT2"	36.57	35.38	72.24	31.34	47.64	12.2	66.73	16.69	12.48	35.79	106.38	22.05	35.24	0.35

6

NOTE:
- All dimensions in inches, unless otherwise stated

Ed	Position	Modified from	Date	Intr./Appd.
6		Update for col. B and for CD190+ (-40°C) col. C, for CD40+ In-Out updated.	28/10/2020	

Attention : 3rd angle projection is used

Parent 3D model	Ed . Version 3D
9829529800-M1	4

Tolerances, if not indicated, according to:				
ATLAS COPCO STANDARD CLASS				
Name DIMENS. DRWG	CD 20-335+	Confidentiality Class acc. to 1102 K: Public		
Material See Drawing		INV		
Treatment Not Applicable				
Atlas Copco	Scale 1 : 15	Family	A2	Compare
STATUS	Drawn by A00549288	Blank nr.		Replaces
Pending	Version Drwg	Blank wt Kg	Fini wt. 115.402 kg	Designation
	Des checked.	Prod checked.	Approved.	Date 23/02/2023

Drawing owner: API

Sheet 1 / 1

9829529800-02

CONFIDENTIAL:
This document is our property and shall not without our permission be altered, copied, used for manufacturing or communicated to any other person or company.